

EN Series Product Data Sheet


Model: EN1119

Overview

The EN Series Power Distribution Unit (PDU) distributes power to devices in the rack and offers real-time metering and network monitoring of power loads for overload avoidance, capacity & load balancing, and energy use optimization. It can be monitored through Web, Telnet, SNMP, or SSH interfaces. The equipment can be only be used with ITE equipment (e.g. inside server rooms).

Features

- 1: Toolless mounting.**
The Rack PDU has two toolless mounting pegs for 0 U mounting capabilities in a rack or enclosure.
- 2: Outlets.**
This EN Series PDU has thirty-six (36) C13 outlets and six (6) C19 outlets.
- 3: OLED.**
Allows for user to view settings and monitor measurements of the PDU.
- 4: Hot Swappable Network Management Card**
- 5: Input Buttons.**
Allow user to navigate and control the content of the OLED display.
- 6: Ethernet connection port.**
Allows for IP network communication.
- 7: Rs485-2 Port.**
Outbound communications port for connecting additional PDU to an Rs-485 daisy chain group.
- 8: Sensor Ports.**
Connection ports for external environmental sensors such as temperature, humidity, dry contact, door status, and fluid leak.
- 9: USB Port.**
Allows for data transfer using a USB flash drive.
- 10: Serial+ Rs485-1 Port.**
Allows for serial communication connection or IN communications port for connecting the PDU to an existing Rs485 daisy chain group.
- 11: Power Cord.**
Field rewirable, top or front cord option. 1m,3m,5m cord lengths available.
- 12: Slim Profile Design**

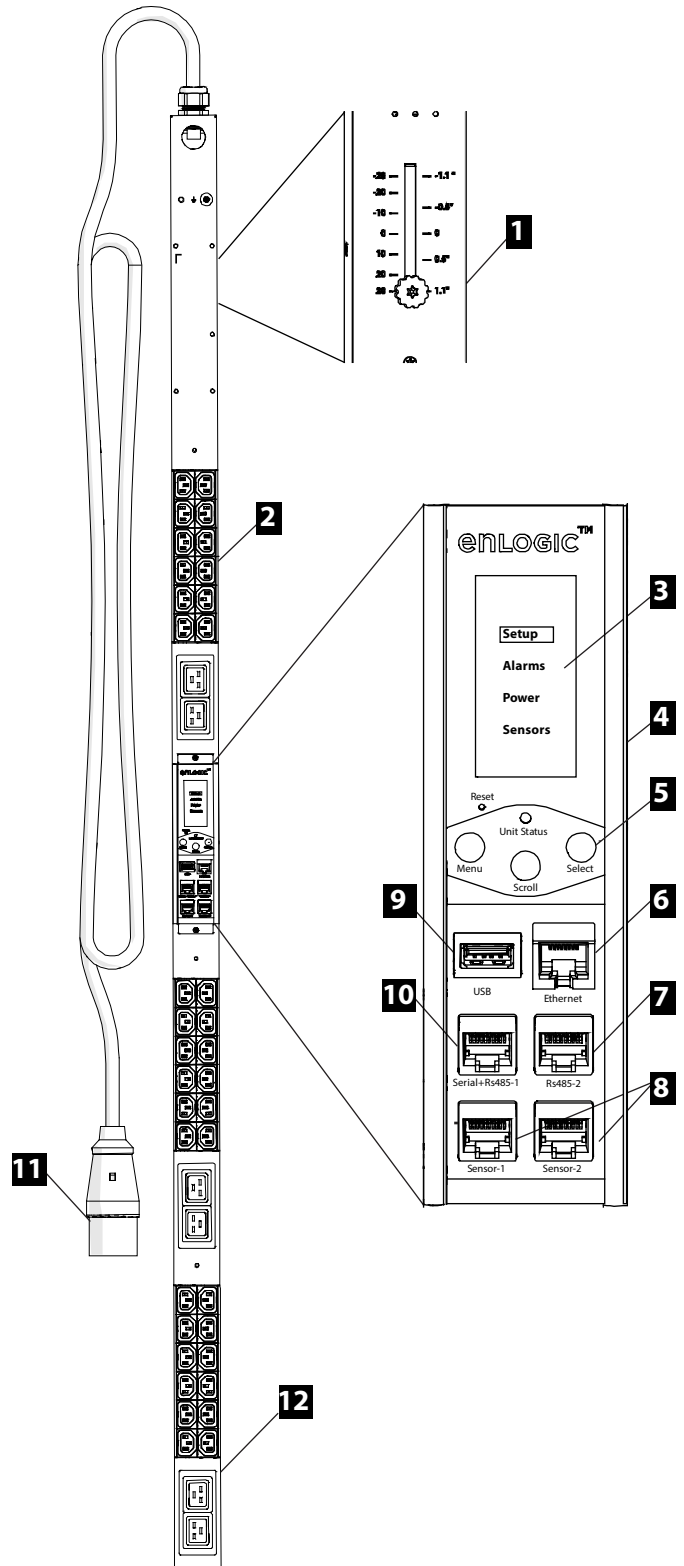

EN Series Product Data Sheet

Model: EN1119

Specifications

Electrical	
Acceptable input voltage	380–415 VAC +6%, -10%
Input current (<i>phase</i>)	16 A
Input frequency	50 Hz
Input power	10.51–11.52 kVA
Input plug	16 A, 5-pin IEC-60309, type 516P6
Input phases	3 phase
Output voltage	100–240 VAC
Maximum output current (<i>phase</i>)	16 A
Maximum output current (<i>outlet</i>)	IEC C13: 10A per outlet, 16A per gang
Outlet Configuration	(36)C13, (6)C19
Physical	
Dimensions (<i>H x W x D</i>)	173.0 x 5.5 x 4.4 cm
Weight	7.5 Kg
Shipping dimensions (<i>H x W x D</i>)	196.5 x 17.0 x 11.5 cm
Shipping Weight	9.5 Kg
Power cord length	3.0 m (factory standard) or 1.0 – 5.0 m (user specified)
Environmental	
Maximum elevation, above MSL (<i>Operating/Storage</i>)	0–3,000 m / 0–15,000 m
Temperature (<i>Operating/Storage</i>)	–5 to 60°C / –25 to 65°C
Humidity (<i>Operating/Storage</i>)	5–95% RH, non-condensing
Compliance	
EMC verification	EN 55022 Class A, EN 55024, EN 61000-3-2, EN 61000-3-3
Safety verification	TÜV , CE , EN/IEC 60950-1
Environmental Verification	ROHS, WEEE



EnLogic Systems Europe, Ltd.
Worcester
United Kingdom WR1 2PG
sales@emea.enlogic.com

EnLogic Systems, LLC.
Wildwood
Missouri USA 63040
sales@amer.enlogic.com

EnLogic Systems Asia Pacific, Ltd.
Tsim Sha Tsui
Kowloon, Hong Kong
sales@apac.enlogic.com